


Models 2VSCNC, 3VSCNC, 4VSQCNC



2VSCNC Shown

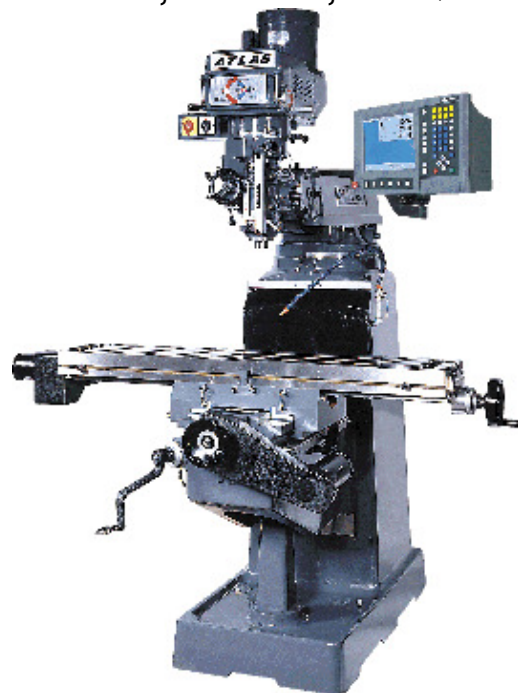

2-axis CNC Vertical Mill w/ACU-RITE® MILLPWR Control

[Overview](#)

[Features](#)

[Optional Accessories](#)

[Machine Specifications](#)

[Control](#)

Overview:

The affordable 2 axis CNC Vertical Mill with features found on higher priced Machines...

- Manual Operation with DRO
- Semi-Automatic Operation
- X and Y Axis CNC Operation

[Back to Top](#)

Features:

- Meehanite Castings for superior rigidity
- Infinitely Variable Spindle Speeds (60-4300 rpm)
- Hardened & Ground Ways
- Column & Knee Way Covers
- Ground T-slots to provide reference edge for positioning workpiece
- Hardened & Ground Table Surface
- Hardened & Ground Spindle
- Chromed & Ground Quill
- Ground Ball Screws & Chromed Motor Shaft
- ABEC 7/CP4 Spindle Bearings
- Coolant System w/Pump & Switch
- Chromed Cross Feed Screw Covers and One-piece Wiper
- Flexible Segmented Coolant Nozzle
- Articulating Head for Compound Angles
- Worm gear angular positioning of head in two directions
- Handwheel fine quill feed
- Lever-operated manual rapid quill movement
- Adjustable automatic feed disengagement for quill feed in both directions
- Reversing switch for clockwise or counter clockwise operation
- Spindle Brake (Hand operated)
- One-shot lubrication
- Mini Electrical Box for Coolant and Mains
- Tool Kit, Test and Accuracy Chart
- Operations Manual/Parts List

[Back to Top](#)

Optional Accessories:

- Chip Tray
- Full Electrics*
- Slotting Attachment
- Air PWR Drawbar #8 & #30*
- Air PWR Drawbar #40*
- Milling Chuck kit W/7 Collets
- Horizontal Milling Attachment
- AC Rapid Vertical Drive (4VSQ)*
- 4" Riser Block (2VS)
- 6" Riser Block (2VS)

- Electric Drawbar*
- 52 Piece Clamping Kit

- 8" Riser Block (All Models)

* Factory Installed only

[Back to Top](#)

Machine Specifications:

Machine Specifications	2VSCNC	3VSCNC	4VSQCNC
Table Size (in.)	9x49	10x54	10x54
No. of T-Slots	3	3	3
T-Slot Width (in.)	5/8	5/8	5/8
T-Slot Center Distance (in.)	2.48	2.48	2.48
Table Ways	Dovetail	Dovetail	Dovetail
Knee Ways	Dovetail	Square	Square
Column Ways	Dovetail	Dovetail	Square
Travels			
X Longitudinal (in.)	30	33	33
Y Cross (in.)	11.5	15.5	16
Knee (in.)	16	17.7	17.7
Ram (in.)	12.2	20.5	26.75
Motors & Spindle			
Motor Hp. variable	3	3	5
Variable Spindle Speed rpm			
Low Range	60-500	60-500	60-500
High Range	550-4300	550-4300	550-4300
Main Spindle Taper	R-8 or ISO 30	R-8 or ISO 30	ISO 40
Spindle Travel (in.)	5	5	5
Quill Feed"/Spindle rev.	.0015/.003/.006	.0015/.003/.006	.0015/.003/.006
Quill Diameter (in.)	3-3/8	3-3/8	4-1/8
Construction			
Column Turret Diameter (in.)	14.9	16.33	16.33
Knee Width (in.)	11.8	14.17	14.75
Column Bearing Length (in.)	16.9	18.1	19.7
Saddle/Table Bearing Length (in.)	19.8	20.5	20.5
Ram/Turret Bearing Length (in.)	15-3/4	17-3/8	17-3/8
Ram Length (in.)	24-1/2	32-3/4	38-5/8
Table Load lbs.	700	880	990
Net Weight lbs.	2090	2970	3630

Specifications subject to change without notice

[Back to Top](#)